




Soft touch 

SKIRTING PROFILES

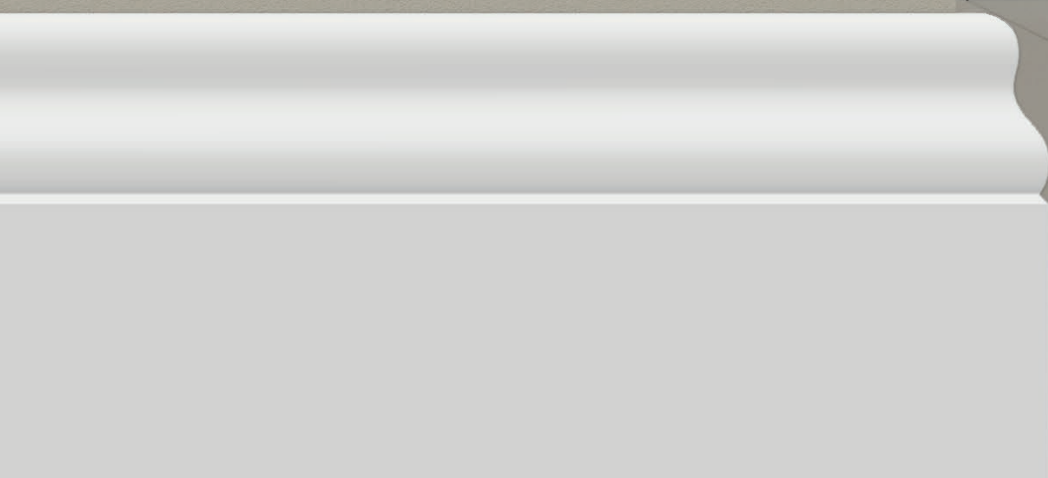

Soft touch
COLORS

	S010 sm white	S020 sm cream	S027 sm mink
S028 sm stone grey	S029 sm new grey	S032 sm new mink	S034 sm winter gates
S036 sm dark grey	S037 sm light grey	S038 sm dust grey	S039 sm graphite
S040 sm black	S063 sm green	S064 sm blue	S065 sm denim
S066 sm indigo	S067 sm pistachio	S069 sm rose	S099 sm night blue

Soft touch SKIRTING PROFILES

	Profile code	Width (mm)
	50078	78
	50098	98
	50118	118
	52078	78
	52098	98
	52118	118
	54078	78
	54098	98
	54118	118

	Profile code	Width (mm)
	51078	78
	51098	98
	51118	118
	53078	78
	53098	98
	53118	118
	55078	78
	55098	98
	55118	118



Gloss level 7,5 GU (ISO2813, 60°)



Excellent soft touch surface



Easy to clean



Antibacterial

DIMENSIONS (mm)

Thickness options	10 / 12 / 15,7
Length	2800
Width options	78 / 98 / 118

- Custom designs can be produced upon client's requests.

TECHNICAL INFORMATION

No	FEATURE	RESULT	STANDARD
1	Gloss level (60° angle)	7,5 GU	EN 14323
2	Scratch resistance	H	TS 7385
3	Assessment of surface resistance to wet heat (85°C)	5 (No change)	EN 12721:09
4	Assessment of surface resistance to dry heat (70°C)	5 (No change)	EN 12722:09
5	Surface abrasion resistance	250 rev. (Class 4)	EN 14323 cls. 5.9
6	Behavior towards impact loading by falling steel ball	No Cracking	EN 14323 cls. 5.14
7	Test of water steam resistance	5 (No change)	EN 14323 cls. 5.11
8	Resistance to staining	5 (No change)	EN 14323 cls. 5.6
9	Assessment of surface resistance to chemical cold liquids (Acetic acid, acetone, ammonia solution, citric acid, cleaning agent, etc.)	5 (No change)	TS EN 12720:2009+A1
10	Colorfastness to light	5. Grade	EN 15187
11	Bending strength (*)	46,2 N / mm ²	EN 310
12	Modulus of elasticity in bending (*)	4145 N / mm ²	EN 310
13	Surface soundness (tensile strength) (*)	1 N / mm ²	EN 311
14	Tensile strength vertical to the surface (*)	0,50 N / mm ²	EN 319
15	Thickness tolerance	± 0,3 mm	TS EN 324-1

- (*) These values are weighted average of the test results.

- Above test results (1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15) are made by TSE.



gizir.com

info@gizir.com

İSTANBUL

Export office & Showroom

Barbaros Mah. Begonya Sok.
Nidakule Ataşehir Kuzey Sit.
No: 3/70 Ataşehir / İstanbul

T: +90 (216) 519 33 73

ADANA

Headquarters

Organize Sanayi Bölgesi,
Çanakkale Cad. No: 17
01350 Sarıçam / Adana

T: +90 (322) 394 43 40 (pbx)